

# **CROP CIRCLE**

## **GRAIN STORAGE RINGS**








#### **Features**

- Easy to set up, take down and re-use
- Compact, Stackable... minimal space required to store when not in use
- One Off Cost
- 300 or 600 GSM Tarp for protection from wind, rain, and wildlife
- No special equipment needed to fill (auger or grain vacuum)
- Standard capacities from 200 to 2000 tones
- Wall heights in 600cm (2 foot) increments up to 2.4 meters (8 foot) maximum.
- Diameters from 8.8 meters (29 foot) to 32 meters (105 Feet)

#### **Construction**

- Corrugated galvanised panels are rolled and crimped on a line. This deep corrugation in 22 gauge material will provide a strong, reusable system for temporary grain storage.
- The Crop Circle package comes complete with tarp hooks and hardware which can be installed on the first available seam line down from the top at intermittent intervals to fasten tarp and rope to the ring.
- Using an eye bolt installed periodically around the diameter in the ground level seam line, a 1/2" diameter anchor pin is driven into place. This system is intended to simply provide temporary security against wind when the ring is empty and untarped.
- The supplied industrial gasket can simply be installed on the top edge of your ring for the entire diameter protecting your tarp from the sharp edges of the steel panels.

## **Tarpaulin**

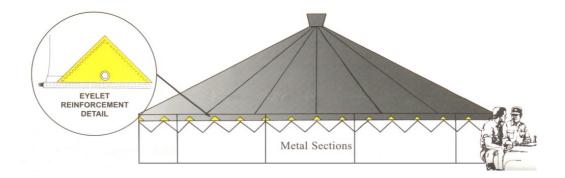

- Vent in top to allow moisture to escape
- Available in 300 GSM and 600 GSM
- Australian made
- Double laminated on both sides.
- Brass eyelets are spaced at 3 foot intervals with reinforced patches
- Rope hem for maximum strength
- Welded seams will not allow water in
- Double stitched construction

### **Specifications**

PART #		SIZE	Capacity Tonnes
2000-02-0029	29'	29'.3 7/16" Dia x 2' High	63
2000-04-0029	29'	29'.3 7/16" Dia x 4' High	90
2000-02-0039	39'	38'.10" Dia x 2' High	136
2000-04-0039	39'	38'.10" Dia x 4' High	185
2000-02-0050	50'	49'.9 13/16" Dia x 2' High	270
2000-04-0050	50'	49'.9 13/16" Dia x 4' High	352
2000-02-0060	60'	60'.1 15/16" Dia x 2' High	455
2000-04-0060	60'	60'.1 15/16" Dia x 4' High	575
2000-02-0070	70'	70'.0 5/16" Dia x 2' High	698
2000-04-0070	70'	70'.0 5/16" Dia x 4' High	859
2000-02-0075	75'	74'.5 13/16" Dia x 2' High	829
2000-04-0075	75'	74'.5 13/16" Dia x 4' High	1012
2000-02-0090	90'	90'.2 7/8" Dia x 2' High	1424
2000-04-0090	90'	90'.2 7/8" Dia x 4' High	1694
2000-02-0105	105'	105'.0 1/2" Dia x 2' High	2195
2000-04-0105	105'	105'.0 1/2" Dia x 4' High	2561

